


## BLACK EPOXY BLOCKS

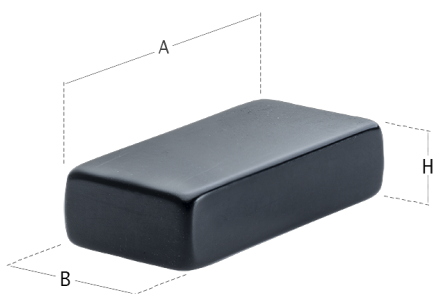

They are obtained by sintering Of Rare Earths.

This new version has a black epoxy coating, suitable for interior design.

This kind of magnets reaches the highest values of magnetic attraction; for this reason, they are recommended where great power is required in small spaces. Another advantage is the maintenance of the magnetic charge which is higher than in other types.

It's recommended to respect the max operating temperatures indicated in [Physical Magnet Data Sheet](#).

**All measurements are in millimeters. Other sizes and shapes on request.**

**The [magnetization](#) is axial. Other kind of magnetization on request.**

CODE	TYPE	A	B	H	STRENGTH KG
BN01.35BE00.1052	SC35MABE	10	5	2	0,75
BN01.35BE00.10102	SC35MABE	10	10	2	1,20
BN01.35BE00.2052	SC35MABE	20	5	2	1,20
BN01.35BE00.20102	SC35MABE	20	10	2	1,95
BN01.35BE00.20105	SC35MABE	20	10	5	4,90
BN01.35BE00.20153	SC35MABE	20	15	3	
BN01.35BE00.25102	SC35MABE	25	10	2	2,40
BN01.35BE00.30102	SC35MABE	30	10	2	2,70
BN01.35BE00.40105	SC35MABE	40	10	5	7,72