


BLACK EPOXY DISCS

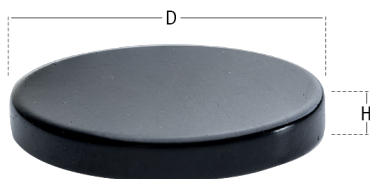

They are obtained by sintering Of Rare Earths.

This new version has a black epoxy coating, suitable for interior design.

This kind of magnets reaches the highest values of magnetic attraction; for this reason, they are recommended where great power is required in small spaces. Another advantage is the maintenance of the magnetic charge which is higher than in other types.

It's recommended to respect the max operating temperatures indicated in [Physical Magnet Data Sheet](#).

All measurements are in millimeters. Other sizes and shapes on request.

The [magnetization](#) is axial. Other kind of magnetization on request.

CODE	TYPE	DIAMETER	H	STRENGTH KG
DN01.35BE00.33	SC35MABE	3	3	0,25
DN01.35BE00.52	SC35MABE	5	2	0,45
DN01.35BE00.510	SC35MABE	5	10	0,84
DN01.35BE00.65	SC35MABE	6	5	1,00
DN01.35BE00.81.5	SC35MABE	8	1,5	0,64
DN01.35BE00.86	SC35MABE	8	6	1,70
DN01.35BE00.92	SC35MABE	9	2	0,95
DN01.35BE00.101.5	SC35MABE	10	1,5	0,70
DN01.35BE00.1010	SC35MABE	10	10	3,00
DN01.35BE00.122	SC35MABE	12	2	1,25
DN01.35BE00.145	SC35MABE	14	5	3,50
DN01.35BE00.151.5	SC35MABE	15	1,5	1,10
DN01.35BE00.153	SC35MABE	15	3	2,50
DN01.35BE00.203	SC35MABE	20	3	4,50