


BLOCKS 35-55MM

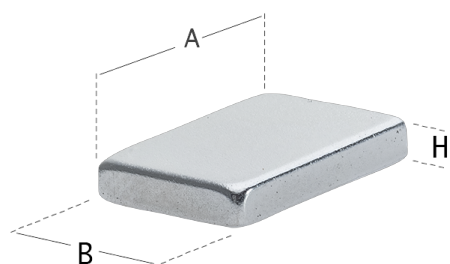

They are obtained by sintering Of Rare Earths. This kind of magnets reaches the highest values of magnetic attraction; for this reason, they are recommended where is required a great power in small spaces. Another advantage is the maintenance of the magnetic charge, higher than in other types. It's recommended to respect the max operating temperatures indicated in [Physical Magnet Data Sheet](#).

All measurements are in millimeters. Other sizes and shapes on request.

The strength of attraction is purely indicative and it could be different depending on the type of application and assembly.

The [magnetization](#) is axial. Other kind of magnetization on request.

CODE	TYPE	A	B	H	STRENGTH KG
BN01.35NI00.35105	SC35MANI	35	10	5	6,50
BN01.35NI00.35132	SC35MANI	35	13	2	2,89
BN01.35NI00.35144	SC35MANI	35	14	4	6,59
BN01.35NI00.35147	SC35MANI	35	14	7	11,90
BN01.35NI00.35148	SC35MANI	35	14	8	12,08
BN01.35NI00.351410	SC35MANI	35	14	10	14,00
BN01.35NI00.35152	SC35MANI	35	15	2	3,18
BN01.35NI00.351510	SC35MANI	35	15	10	15,30
BN01.35NI00.35205	SC35MANI	35	20	5	9,84
BN01.35NI00.3754	SC35MANI	37	5	4	3,82
BN01.35NI00.4051	SC35MANI	40	5	1	0,82
BN01.35NI00.4052	SC35MANI	40	5	2	2,00
BN01.35NI00.4055	SC35MANI	40	5	5	4,90
BN01.35NI00.40100.5	SC35MANI	40	10	0,5	0,95
BN01.35NI00.40102	SC35MANI	40	10	2	2,58
BN01.35NI00.40103	SC35MANI	40	10	3	4,03
BN01.35NI00.40105	SC35MANI	40	10	5	7,72
BN01.35NI00.40108	SC35MANI	40	10	8	10,62
BN01.35NI00.40152	SC35MANI	40	15	2	3,28
BN01.35NI00.40155	SC35MANI	40	15	5	9,25
BN01.35NI00.401510	SC35MANI	40	15	10	16,23
BN01.35NI00.401810	SC35MANI	40	18	10	18,04
BN01.35NI00.40205	SC35MANI	40	20	5	10,23

BN01.35NI00.402010	SC35MANI	40	20	10	22,00
BN01.35NI00.40222	SC35MANI	40	22	2	3,60
BN01.35NI00.4563	SC35MANI	45	6	3	3,66
BN01.35NI00.45155	SC35MANI	45	15	5	9,74
BN01.38ZN00.5052.5	SC38MAZN	50	5	2,5	2,80
BN01.35NI00.5053	SC35MANI	50	5	3	4,50
BN01.35NI00.5055	SC35MANI	50	5	5	5,63
BN01.35NI00.50102	SC35MANI	50	10	2	3,13
BN01.35NI00.50103	SC35MANI	50	10	3	4,50
BN01.35NI00.50105	SC35MANI	50	10	5	9,00
BN01.35NI00.50145	SC35MANI	50	14	5	9,85
BN01.35NI00.50205	SC35MANI	50	20	5	11,00
BN01.35NI00.502010	SC35MANI	50	20	10	21,40
BN01.35NI00.50255	SC35MANI	50	25	5	12,00
BN01.35NI00.502525	SC35MANI	50	25	25	50,00
BN01.35NI00.50275	SC35MANI	50	27	5	12,15
BN01.35NI00.505020	SC35MANI	50	50	20	73,00
BN01.35NI00.505025	SC35MANI	50	50	25	93,00
BN01.35NI00.536.33	SC35MANI	53	6,3	3	3,70
BN01.35NI00.55142	SC35MANI	55	14	2	3,43
BN01.35NI00.55222	SC35MANI	55	22	2	3,80