


DISCS 20-28 MM

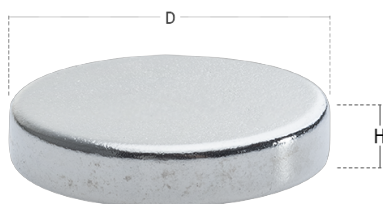

They are obtained by sintering Of Rare Earths. This kind of magnets reaches the highest values of magnetic attraction; for this reason, they are recommended where great power is required in small spaces. Another advantage is the maintenance of the magnetic charge which is higher than in other types. It's recommended to respect the max operating temperatures indicated in [Physical Magnet Data Sheet](#).

All measurements are in millimeters. Other sizes and shapes on request.

The strength of attraction is purely indicative and it could be different depending on the type of application and assembly.

The [magnetization](#) is axial. Other kind of magnetization on request.

CODE	TYPE	DIAMETER	H	STRENGTH KG
DN01.35NI00.200.5	SC35MANI	20	0,5	0,20
DN01.35NI00.201	SC35MANI	20	1	0,70
DN01.35NI00.201.2	SC35MANI	20	1,2	1,33
DN01.35NI00.201.5	SC35MANI	20	1,5	1,69
DN01.35NI00.202	SC35MANI	20	2	2,30
DN01.35NI00.202.5	SC35MANI	20	2,5	2,83
DN01.35NI00.203	SC35MANI	20	3	4,20
DN01.35NI00.204	SC35MANI	20	4	4,44
DN01.35NI00.205	SC35MANI	20	5	5,40
DN01.35NI00.205.8	SC35MANI	20	5,8	7,14
DN01.35NI00.206	SC35MANI	20	6	6,26
DN01.35NI00.208	SC35MANI	20	8	8,82
DN01.35NI00.2010	SC35MANI	20	10	10,00
DN01.35NI00.2020	SC35MANI	20	20	12,28
DN01.35NI00.222	SC35MANI	22	2	2,50
DN01.35NI00.223	SC35MANI	22	3	3,73
DN01.35NI00.225	SC35MANI	22	5	6,00
DN01.35NI00.2210	SC35MANI	22	10	11,50
DN01.35NI00.2220	SC35MANI	22	20	14,00
DN01.35NI00.233	SC35MANI	23	3	4,50
DN01.35NI00.236	SC35MANI	23	6	7,43
DN01.35NI00.244	SC35MANI	24	4	5,42

DN01.35NI00.2410	SC35MANI	24	10	11,58
DN01.35NI00.2411	SC35MANI	24	11	12,35
DN01.35NI00.24.53.5	SC35MANI	24,5	3,5	4,00
DN01.35NI00.24.510	SC35MANI	24,5	10	13,95
DN01.35NI00.24.75	SC35MANI	24,7	5	6,90
DN01.35NI00.251.5	SC35MANI	25	1,5	1,90
DN01.35NI00.252	SC35MANI	25	2	2,60
DN01.35NI00.253	SC35MANI	25	3	4,28
DN01.35NI00.254	SC35MANI	25	4	7
DN01.35NI00.255	SC35MANI	25	5	8,50
DN01.35NI00.257	SC35MANI	25	7	9,34
DN01.35NI00.2510	SC35MANI	25	10	14,00
DN01.35NI00.283	SC35MANI	28	3	4,86
DN01.35NI00.288	SC35MANI	28	8	11,50
DN01.35NI00.2810	SC35MANI	28	10	14,20
DN01.35NI00.2820	SC35MANI	28	20	21,00