


RINGS 7,5-18MM

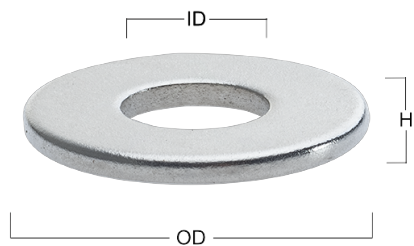

They are obtained by sintering of Rare Earths. This kind of magnets reaches the highest values of magnetic attraction; for this reason, they are recommended where is required a great power in small spaces. Another advantage is the maintenance of the magnetic charge, higher than in other types. It's recommended to respect the max operating temperatures indicated in [Physical Magnet Data Sheet](#).

All measurements are in millimeters. Other sizes and shapes on request.

The strength of attraction is purely indicative and it could be different depending on the type of application and assembly.

The [magnetization](#) is axial. Other kind of magnetization on request.

CODE	TYPE	OD	ID	H	STRENGTH KG
RN01.35NI00.712	SC35MANI	7	1	2	0,65
RN01.35NI00.7.541.5	SC35MANI	7,5	4	1,5	0,42
RN01.35NI00.852	SC35MANI	8	5	2	0,53
RN01.35NI00.94.83	SC35MANI	9	4,8	3	1,10
RN01.35NI00.9.561.5	SC35MANI	9,5	6	1,5	0,53
RN01.35NI00.1045	SC35MANI	10	4	5	2,13
RN01.35NI00.1051.5	SC35MANI	10	5	1,5	0,67
RN01.35NI00.1052	SC35MANI	10	5	2	1,00
RN01.35NI00.10.56.42.2	SC35MANI	10,5	6,4	2,2	1,20
RN01.35NI00.1224	SC35MANI	12	2	4	2,70
RN01.35NI00.1262	SC35MANI	12	6	2	1,10
RN01.35NI00.1264	SC35MANI	12	6	4	2,23
RN01.35NI00.1372	SC35MANI	13	7	2	1,14
RN01.35NI00.1372.5	SC35MANI	13	7	2,5	1,40
RN01.35NI00.1372.6	SC35MANI	13	7	2,6	1,50
RN01.35NI00.1383	SC35MANI	13	8	3	1,04
RN01.35NI00.1393	SC35MANI	13	9	3	1,60
RN01.35NI00.1461	SC35MANI	14	6	1	0,62
RN01.35NI00.1461.3	SC35MANI	14	6	1,3	0,90
RN01.35NI00.1462	SC35MANI	14	6	2	1,37
RN01.35NI00.1464	SC35MANI	14	6	4	2,95
RN01.45NI00.14610	SC35MANI	14	6	10	7,3
RN01.35NI00.14.410.63	SC35MANI	14,4	10,6	3	1,57

RN01.35NI00.14.562	SC35MANI	14,5	6	2	1,46
RN01.35NI00.1566	SC35MANI	15	6	6	4,50
RN01.35NI00.15123.5	SC35MANI	15	12	3,5	1,63
RN01.35NI00.1662	SC35MANI	16	6	2	1,70
RN01.35NI00.16.512.51.5	SC35MANI	16,5	12,5	1,5	0,88
RN01.35NI00.17.57.51	SC35MANI	17,5	7,5	1	0,77
RN01.35NI00.17.57.51.5	SC35MANI	17,5	7,5	1,5	1,40
RN01.35NI00.17.57.53	SC35MANI	17,5	7,5	3	2,75
RN01.35NI00.17.5101.5	SC35MANI	17,5	10	1,5	1,27
RN01.35NI00.17.5123	SC35MANI	17,5	12	3	2,25
RN01.35NI00.182.83	SC35MANI	18	2,8	3	3,23
RN01.35NI00.1862	SC35MANI	18	6	2	2,00
RN01.35NI00.1881	SC35MANI	18	8	1	0,83
RN01.35NI00.1882	SC35MANI	18	8	2	1,87
RN01.35NI00.1883	SC35MANI	18	8	3	3,00
RN01.35NI00.1884	SC35MANI	18	8	4	4,05
RN01.35NI00.1888	SC35MANI	18	8	8	6,73
RN01.35NI00.1892	SC35MANI	18	9	2	1,80
RN01.35NI00.18101.5	SC35MANI	18	10	1,5	1,33