


THREADED THROUGH HOLE

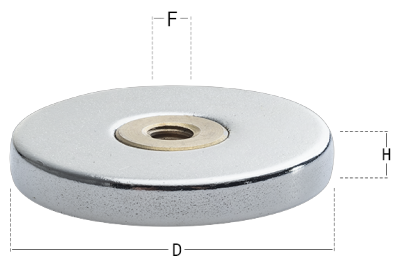

THREADED THROUGH HOLE Magnets can be locked with a threaded screw.

The **magnetization** is axial. Other kind of magnetization on request.

All the measurements available

CODE	D	H	M THREAD (F)	STRENGTH KG
SN02.35NI00.20M3 MB	20	3	M3	4
SN02.35NI00.20M4 MB	20	3	M4	4
SN02.35NI00.21M5 MB	21	8	M5	10,2
SN02.35NI00.22M4 MB	22	3	M4	6
SN02.35NI00.30M5 MB	30	5	M5	13
SN02.35NI00.48M5 MB	48	10	M5	41

Max temperature 80 °C / Also Available SH Type 150 °C. [Physical Magnet Data Sheet](#).  
The strength of attraction is purely indicative and it could be different depending on the type of application and assembly.

All measurements are in millimeters. Other sizes and shapes on request.