


FERRITE DISCS

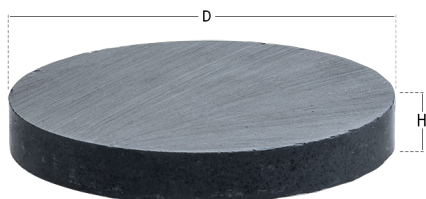

Ferrite magnets are made up of iron oxides, barium and strontium. They are available in different shapes (rectangular, cylindrical, sectors, rings) in standard and optional sizes .

They are also used for the production of speakers, DC motors, phones, computers, generators, control equipment, floors, toys and promotional items.

The [magnetization](#) is axial. Other kind of magnetization on request.
The strength of attraction is purely indicative and it could be different depending on the type of application and assembly.

CODE	D	H	STRENGTH KG
DFE3.000000.810	8	10	0,25
DF01.300000.104	10	4	0,25
DF01.300000.107	10	7	0,45
DF01.300000.123	12	3	0,20
DF01.300000.1515	15	15	1,00
DF01.300000.162.5	16	2.5	
DF01.300000.163	16	3	0,25
DF01.300000.165	16	5	0,50
DF01.300000.185	18	5	
DF01.300000.202	20	2	0,18
DF01.300000.203	20	3	0,28
DF01.300000.205	20	5	0,55
DF01.300000.2010	20	10	1,0
DF01.300000.252	25	2	
DF01.300000.253	25	3	0,45
DF01.300000.255	25	5	0,90
DF01.300000.2510	25	10	2,00
DF01.300000.303	30	3	0,6
DF01.300000.304	30	4	0,70
DF01.300000.307	30	7	1,70
DF01.300000.3010	30	10	2,20
DF01.300000.325	32	5	1,20
DF01.300000.378	37	8	2,5
DF01.300000.387	38	7	

All measurements are in millimeters. Other sizes and shapes by request.

Technical features

TYPE	Br - mT	BHc - KA/m	Hcj - KA/m	BH Max - KJ/m3
Y08T	200 - 235	125 - 160	210 - 280	6.5 - 9.5
Y22H	310 - 360	220 - 250	280 - 320	20.0 - 24.0
Y25	360 - 400	135 - 170	140 - 200	22.5 - 28.0
Y26H	360 - 390	200 - 250	225 - 255	23.0 - 28.0
Y26J	360 - 380	263 - 288	318 - 350	24.0 - 28.0
Y27H	350 - 380	225 - 240	235 - 260	25.0 - 29.0
Y28	370 - 400	175 - 210	180 - 220	26.0 - 30.0
Y28H	380 - 400	240 - 260	250 - 280	27.0 - 30.0
Y28J	360 - 380	271 - 295	282 - 305	26.0 - 30.0
Y30H	380 - 400	230 - 275	235 - 290	27.0 - 32.0
Y30J	395 - 415	275 - 300	310 - 335	27.0 - 32.5
Y32	400 - 420	160 - 190	165 - 195	30.0 - 33.5
Y32H	400 - 420	190 - 230	230 - 250	31.5 - 35.0
Y32J	400 - 440	224 - 240	230 - 250	31.0 - 34.0
Y33	410 - 430	220 - 250	225 - 255	31.5 - 35.0
Y33H	410 - 430	250 - 270	250 - 275	31.5 - 35.0
Y34	420 - 440	200 - 230	205 - 235	32.5 - 36.0
Y35	430 - 450	215 - 239	217 - 241	33.1 - 38.2
Y36	430 - 450	247 - 271	250 - 274	35.1 - 38.3
Y38	440 - 460	285 - 305	294 - 310	36.6 - 40.6
Y40	440 - 460	330 - 354	340 - 360	37.5 - 41.8